


# Rittal RiLine60 D-Switch

## Bus-mounting fuse base 63 A (3-pole)

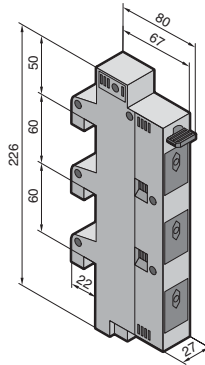

Rittal RiLine60 D-Switch

- 3-pole switchable bus-mounting fuse base for snap-on mounting on 12 – 30 x 5/10 mm busbars or PLS 800/1600 with 60 mm bar centre distance.
- For the use of fuse inserts to DIN 49 522.
- With integral visual fuse monitoring via flashing indicator.
- Safely released via independent manual actuation.
- Lockable in the isolated position.
- Lockable and sealable.
- A display panel integrated into the enclosure visually indicates the device's operating status.

**Material:**  
Polyamide (PA 6).  
Fire protection corresponding to UL 94-V0.

**Colour:**  
RAL 7035

**Basis of test:**  
DIN EN 60 947-3

**Supply includes:**  
Reducing retaining springs.

Rated operating current $I_e$	63 A
Rated operating voltage $U_e$	400 V~
Service short-circuit breaking capacity $I_{cn}$	50 kA
Number of poles	3-pole
Fuse inserts	D01 <sup>1)</sup> /D02
Terminal for round conductors <sup>2)</sup>	1.5 – 25 mm <sup>2</sup>
Tightening torque Terminal screw	3 – 4 Nm
Level of contamination	3
Overvoltage category	IV
Min. voltage, indicator light	100 – 400 V~
Switching category	AC 22B
Contact hazard protection	IP 20
Packs of	3
<b>Model No. SV</b>	<b>9340.950</b>

<sup>1)</sup> When using D01 fuses, reducing retaining springs must be used.

<sup>2)</sup> Wire end ferrules should be used with fine wire conductors.