
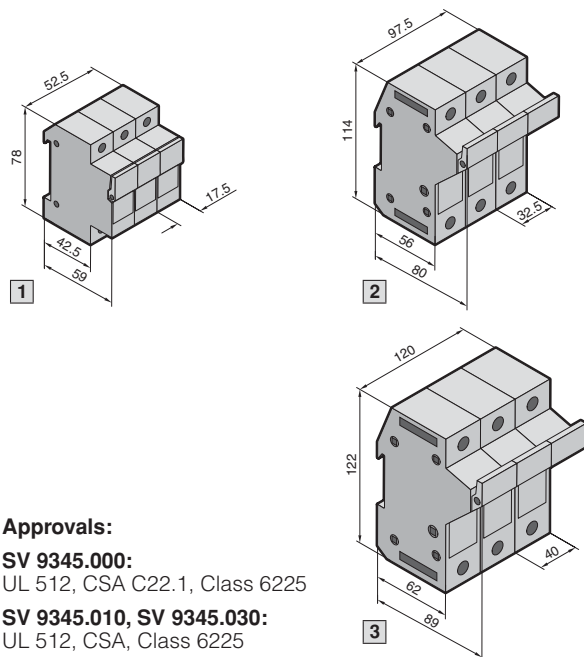


## Fuse holder (3-pole)

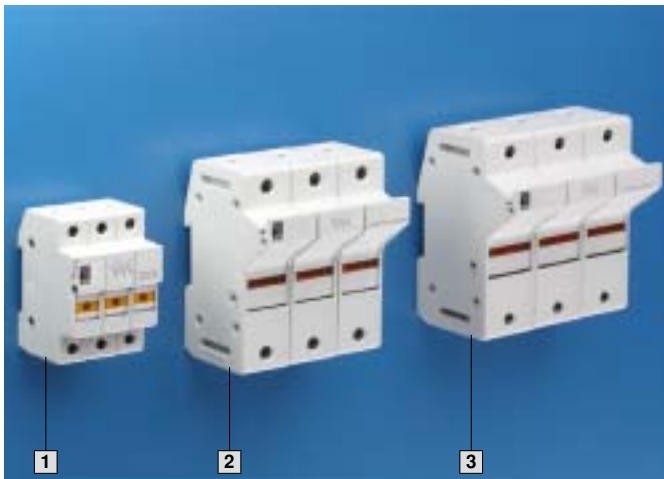

- UL/CSA Listed.
- Fuse holder for the use of fuses to American/Canadian standards.
- For snap-on mounting on 35 mm support rails to DIN EN 60 715 (7.5/15 mm high) or RiLine60 component adaptor combinations (OM adaptors/supports, see Cat. 32, page 362 – 365, 368).
- Visual fuse monitoring via indicator lights.
- 3-pole, switchable off-load.

**Material:**  
Polyamide (PA 6).  
Fire protection corresponding to UL 94-V0.

**Colour:**  
RAL 7035

**Approvals:**  
**SV 9345.000:**  
UL 512, CSA C22.1, Class 6225  
**SV 9345.010, SV 9345.030:**  
UL 512, CSA, Class 6225

Version	1	2	3
Fuse type (class)	CC	J	J
Rated operating current I <sub>e</sub>	30 A	30 A	60 A
Rated operating voltage U <sub>e</sub>	600 V~	600 V~	600 V~
Number of poles	3-pole	3-pole	3-pole
Fuse size	10 x 38 mm	21 x 57 mm	27 x 60 mm
Switching capacity RSM Sym Rating	200 kA	200 kA	200 kA
Min. voltage, indicator light	115 V ≈	115 V ≈	115 V ≈
Connection of round conductors	2.5 – 10 mm <sup>2</sup> AWG 6 – 14	2.5 – 25 mm <sup>2</sup> AWG 2 – 14	2.5 – 25 mm <sup>2</sup> AWG 2 – 14
Tightening torque Terminal screw	2 Nm 14.75 in-lbs solid/stranded Cu	4 Nm 88.90 cm-lbs solid/stranded Cu	5 Nm 114.30 cm-lbs solid/stranded Cu
Contact hazard protection	IP 20	IP 20	IP 20
Packs of	4	2	2
<b>Model No. SV</b>	<b>9345.000</b>	<b>9345.010<sup>1)</sup></b>	<b>9345.030</b>

<sup>1)</sup> May also be used for cylindrical fuses 22 x 58 mm to French standards without UL licensing.